

SAFE LOCK

ESAFE-H-60



I. IMPORTANT NOTES

1. Touch any key on the keypad to wake the system. Full voice guidance is provided; follow the voice prompts to operate.
2. Factory default settings:
 - Password: 123456
 - No fingerprint registered – any fingerprint will unlock the door.
3. Password length: 3 to 12 digits.
4. Once a user password is set, the "any fingerprint" function is disabled. Once a fingerprint is enrolled, the factory default password "123456" becomes invalid.

II. UNLOCKING OPERATIONS

1. Normal Mode – Enter the correct password or present a valid fingerprint (if no fingerprint is enrolled, any fingerprint works). The solenoid will engage for 6 seconds, and the voice prompt "Verification successful" will be heard; the safe door opens.
2. Security Mode – Enter the correct password AND present the correct fingerprint. The solenoid engages for 6 seconds, the voice prompt "Verification successful" sounds, and the door opens.

III. SETUP OPERATIONS

Press the Setup key once; the voice will guide you:

- Press 1 to set a user password
- Press 2 to add a fingerprint
- Press 3 to set the unlocking mode (Normal: single fingerprint OR single password; Security: password + fingerprint)
- Press 4 to configure Wi-Fi
- Press * to exit

① Set User Password

Enter programming mode by pressing 1. The voice prompts: "Please enter a user password and confirm with the # key." Enter a 3- to 12-digit password (the user code) and press # to confirm. The voice will say "Please enter again"; re-enter the same password. Upon success, the voice says "Setup successful" and returns to the main programming menu. If the password does not meet requirements, the voice says "Input error, please try again."

② Add Fingerprint

In programming mode, press 2. The voice prompts "Please place your finger" and the fingerprint sensor light turns on. Place your finger; if enrolment succeeds, the voice says "Registration successful." If it fails, two short beeps sound and the system returns to the main programming menu.

③ Set Unlocking Mode (Default: Normal Mode)

In programming mode, press 3. The voice prompts: "For Normal Mode, press 1; for Security Mode, press 2." If an invalid key is pressed, the voice says "Input error, please try again."

Note: When setting Security Mode, both a numeric password and at least one fingerprint must be registered; otherwise, the setting cannot be completed.

④ Configure Wi-Fi

In programming mode, press 4; the SET LED starts flashing, indicating the panel is in pairing mode. Download the mobile app "Tuya Smart", open it, select "Add Device", enter your Wi-Fi password, and connect to bind the device.

⑤ During Setup

Press the * key at any time to return to the previous menu.

IV. REMOTE UNLOCKING

1. Wake the panel and enter 00#; the SET LED starts flashing, indicating the remote unlock request mode is active. Your phone will receive a remote unlock request. Open the app and confirm the request to unlock the safe remotely.

V. ALARM ACTIVATION

1. Wake the system with any key, then press the * key once. The voice prompt "Guard on" will sound. When the safe body is subjected to vibration, the alarm siren will sound for 30 seconds. Incorrect password attempts also trigger a 30-second alarm.
2. After three consecutive incorrect password entries or five consecutive incorrect fingerprint attempts, the safe will emit a loud internal alarm.
3. In both cases above, the alarm can be cancelled by entering a correct password or presenting a valid fingerprint.


VI. LOW-VOLTAGE WARNING

If the battery voltage falls below 4.8 ± 0.3 V, the system will give a voice prompt "Low battery, please replace the batteries" when waking or unlocking.

VII. FACTORY RESET

Press and hold the Setup key for 3–5 seconds. The voice will announce "Factory reset successful." After reset, the safe returns to factory defaults: password 123456 and any fingerprint can unlock the door.

Manage Time & Attendance for all your Branches from Head Office

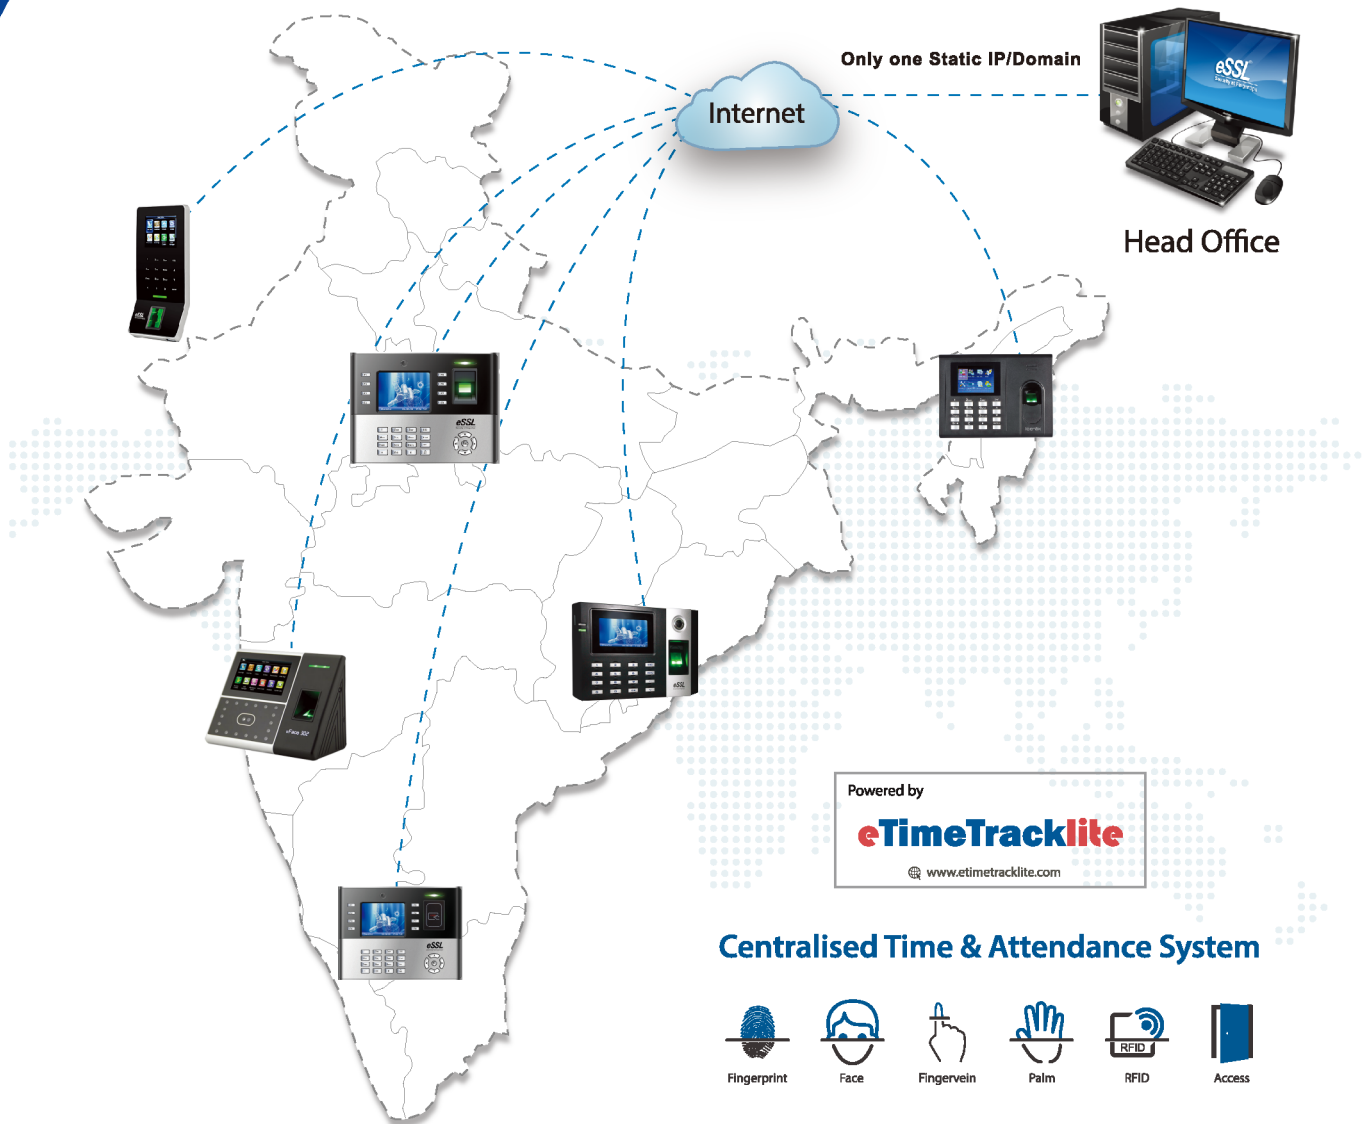

Centralised Time & Attendance System



Disclaimer : Specifications can be changed without prior notice.

1. Buying and Selling eSSL products online is prohibited and is termed as illegal
2. Installation / Technical support / Training to end user is the responsibility of the installer or dealer
3. eSSL do not support end user directly, if they want support charges will be applicable



Enterprise Software Solutions Lab Pvt. Ltd. (Corporate-Office)

#24, 23rd main, Shambhavi Building, J P nagar 2nd phase, Bengaluru - 560078

www.esslsecurity.com | sales@esslsecurity.com | Ph : 91-8026090500