

SAFE LOCK

ESAFE-L-36




Safe Box

Instruction Manual

Dear valued customer:

Thank you for choosing our products! You have taken an important step in organizing and protecting your most valued possessions. Every series of our safe is professionally made and designed to provide safety. Please take time to read and familiarize yourself with the proper operating procedures of your new safe presented on the following pages

The image shown here is for reference only. The actual product may differ.

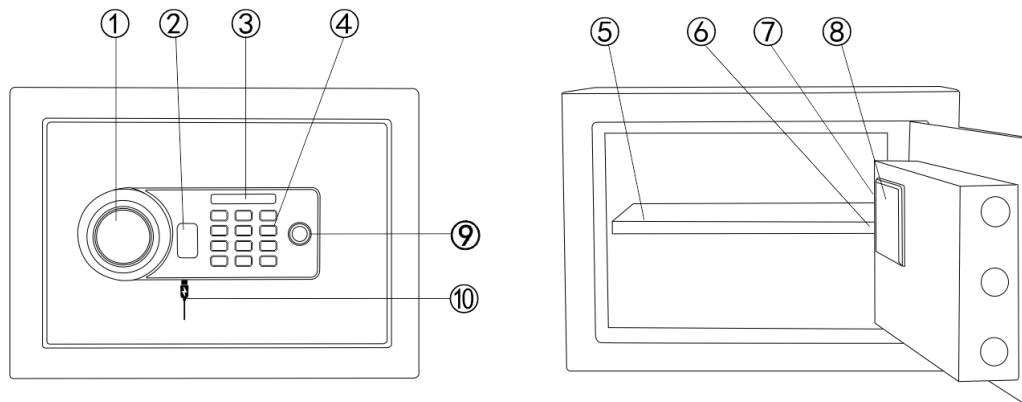

- | | | | |
|----------------------|-----------------------------------|-------------------|----------------|
| ① Knob | ② Emergency Keyhole | ③ Indicator light | ④ Digital Keys |
| ⑤ Removable shelf | ⑥ Lamp | ⑦ Reset button | ⑧ Battery box |
| ⑨ fingerprint unlock | ⑩ Socket for external battery box | | |

1.Initial Use

- ① Find the emergency keys in the accessories' bag;
- ② Remove the emergency lock cover;
- ③ Insert the emergency key, press gently and turn it anticlockwise, clockwise turn the knob at the same time to open the door;

CAUTION: Also can connect Type-C cable to open the safe box in the first time use, input '1 5 9' password to open the door.

2. Instruction

- (1) Press the setting button once, the yellow light will flash.
- (2) "START" or "ENTER" indicates confirmation.
- (3) If no input in the keyboard after 20 seconds, the safe will be in sleeping mode.
- (4) Once into sleeping mode, all the operation will be stopped, press any key to restart.
- (5) The light will flash 10 seconds when you press any key, the light color is blue.

3. Insert the batteries

- ① With the door open;
- ② Insert 4x5V batteries ("AA" alkaline batteries) into the battery box;
- ③ Under normal condition, if the buzzer beeps 6 times and the red light flashes 6 times, it means the voltage is low and you should insert new batteries.

CAUTION: The external type-c interface can be used when the internal battery is dead.

4. Open the door

① Electronic Password

Press "START", input your user's code (3 to 15 digits), press "ENTER", hear the "do, re, mi" sound, the door will be opened.

② Fingerprint

Place the registered finger on the fingerprint head, the buzzer beeps once and hear the sound of "do, re, mi", the door will be opened.

③ Security mode open

First, enter the registered fingerprint, after verification, enter the electronic password, the buzzer beeps once and hear the sound of "do, re, mi", the door will be opened. (You can also enter the registered password first, and then enter the registered fingerprint).

5. Set Password

- ① Press the green (set) button
- ② When the button light shining, enter the 3-15 digits you want to set and press "ENTER" button.
- ③ Press the same password again and press "ENTER" to confirm. The buzzer emits "do, re, mi", indicating that the password is set successfully.

For example:

Password is 123456789012345

Press green (set) button, press 123456789012345, press "ENTER"

6. Set Fingerprint

- ① Press the green (set) button
- ② Put your finger on the fingerprint head, the buzzer emits a beep and the light flashes once, take away your finger, record 5 times in turn, after hearing "do, re, mi " sound, the fingerprint is set successfully.

CAUTION: The capacity of fingerprint is 50 PCS.

7.Set Security Mode

- ① Press green(set)button+8+ENTER+ password +ENTER, open the security mode , you need to enter your fingerprint and password when you open the door.
- ② Press green(set)button+7+ENTER+ password +ENTER, close the security mode , you need to enter your fingerprint or password when you open the door.

8.Delete the Fingerprint

- ① Press green(set)button+4+ENTER+ password +ENTER, all the fingerprints will be deleted and you can't use fingerprint to open the door.


9. Alarm

- ①The buzzer will beep 1 minute if you input 3 consecutive wrong passwords or 6 consecutive wrong fingerprints;
- ②Enter the correct password or fingerprint, the alarm sound will be stopped.

10.Silent mode settings

1. Press "Start" and long press "1", when the green light shining, Silent Mode open, you won't hear the voice when you press button.
2. Press "Start" and long press "1", when the green light shining, Silent Mode Close, you will hear the voice when you press button.

Manage Time & Attendance for all your Branches from Head Office

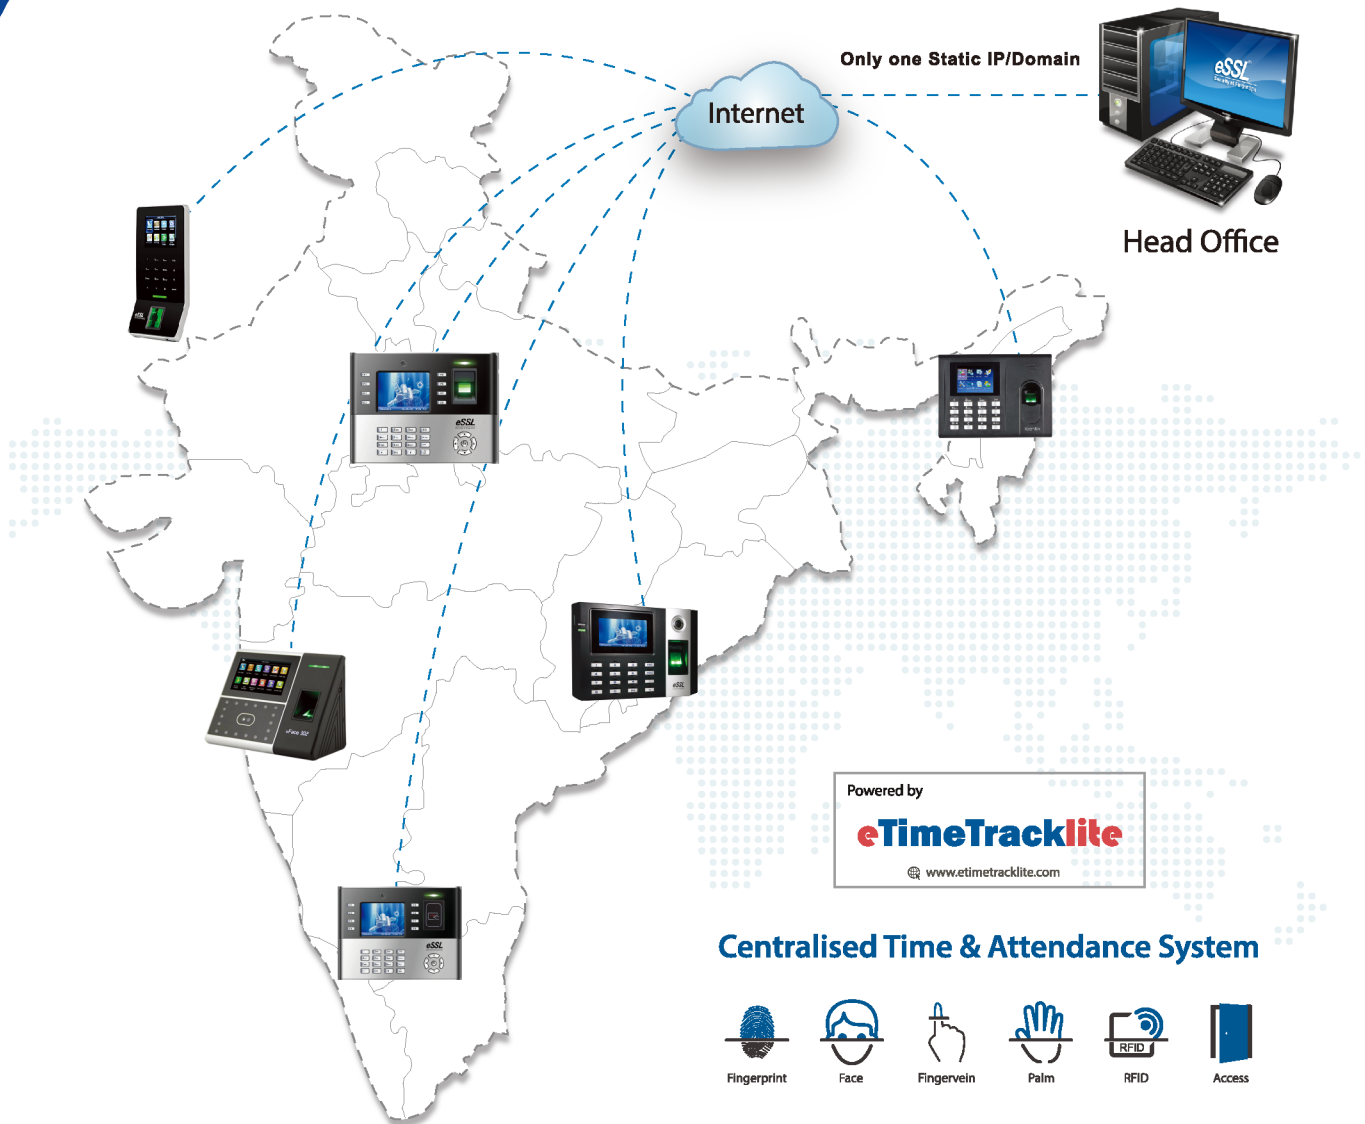

Disclaimer : Specifications can be changed without prior notice.

1. Buying and Selling eSSL products online is prohibited and is termed as illegal
2. Installation / Technical support / Training to end user is the responsibility of the installer or dealer
3. eSSL do not support end user directly, if they want support charges will be applicable



Enterprise Software Solutions Lab Pvt. Ltd. (Corporate-Office)

#24, 23rd main, Shambhavi Building, J P nagar 2nd phase, Bengaluru - 560078

www.esslsecurity.com | sales@esslsecurity.com | Ph : 91-8026090500